

Procure



**Powered By Choice,
Driven By You.**

Specifications

SMART Board® 6065-V2 interactive flat panel with iQ

Model SPNL-6265-V2

Overview

The SMART Board® 6065-V2 interactive flat panel with iQ is the hub of your classroom. iQ technology connects devices, lesson content and pedagogically relevant software to create a cohesive educational experience. PC-free embedded computing provides one-touch access to a diverse suite of SMART applications—Notebook lessons, workspaces, gamification activities and whiteboard—and collaborative tools, such as wireless screen sharing and a web browser. There's no need for wires, cables or manual software and firmware updates.




The 65" 4K ultra-high-definition LED display provides optimal image clarity and wide viewing angles. With the Pen ID™ feature, you can assign different appearances to the two pens and write or draw over any application in digital ink.

Object awareness™ allows you to perform mouse functions with your finger, write in digital ink with the pen, and erase with your palm or eraser—all without switching tools or modes. You can use a variety of gestures in applications, and two users can write or draw at the same time.

See education.smarttech.com for more information about this product.

Dimensions and weights¹

Dimensions

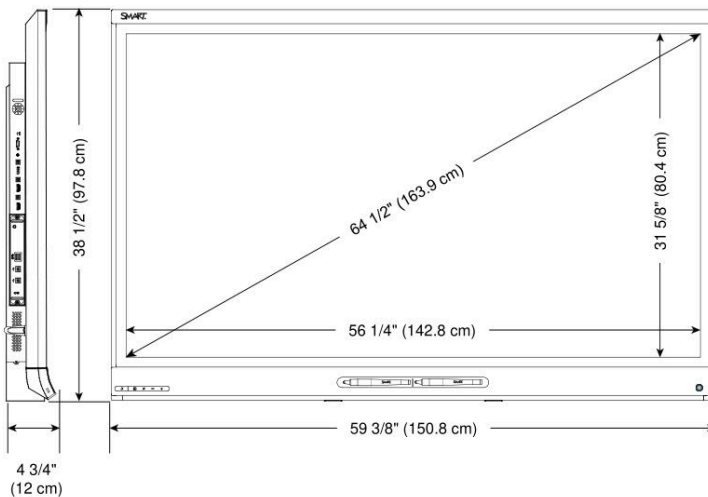

Weight

134 lb. (60.9 kg)

Shipping dimensions (including pallet)

69 1/4" × 49 5/8" × 11 7/8"
(175.8 cm × 126.1 cm × 30.3 cm)

Shipping weight

181 lb. (82.1 kg)

SPECIFICATIONS

SMART BOARD 6065-V2 INTERACTIVE FLAT PANEL WITH IQ – MODEL SPNL-6265-V2

Hardware

Interaction

Touch technology	DViT® (Digital Vision Touch) technology
Multitouch capabilities	8 touches ²
Object awareness	Behavior adjusts automatically to the tool or object you're using, whether it's a pen, finger, eraser or palm.
Pen ID	Two people can write independently and simultaneously, using different colored ink.

Display

Type	LED
Aspect ratio	16:9
Optimal resolution	3840 × 2160 at 30 Hz (HDMI®) or 60 Hz (DisplayPort)
Horizontal frequency	26.97–75.0 kHz
Vertical frequency	23.9–60.32 Hz
Contrast ratio (typical)	1200:1
Brightness (maximum)	338 cd/m ²
Pixel dimensions	0.372 mm × 0.372 mm
Gamut	68% of NTSC
Viewing angle	178°
Response time (typical)	8 ms

Presence detection Presence detection sensor on the bottom frame

Audio 10 W integrated speakers (×2)

Noise level <35 dBA

Included cables and accessories
 iQ appliance
 8' (2.4 m) country-specific power cable
 16' 5" (5 m) USB cable
 Pen (×2)

iQ appliance

Wi-Fi	IEEE 802.11A/B/G/N/AC with 2 × 2 MIMO (both 2.4 and 5 GHz bands)
Bluetooth®	Bluetooth 4.2 dual mode (backwards compatible with Bluetooth 2.1 + EDR)
Capture options	Establish a Bluetooth wireless connection with a supported mobile device (see below) by scanning the interactive display's unique QR code

²Requires SMART Product Drivers to be installed. Some applications might not support 8 touches. Only up to 4 touch points and no pen support on Chrome OS™ operating system.

Supported languages	Danish Dutch English Finnish French German Italian Korean Norwegian Portuguese Russian Simplified Chinese Spanish Swedish Traditional Chinese Ukrainian Vietnamese
Mounting holes	For a standard VESA® 300 mm × 400 mm mounting plate Lower mounting holes 13 3/4" (35 cm) from the bottom of the display
Mounting bracket depth	Minimum depth of 1 5/8" (4.2 cm) for all components on the back of the display to clear the wall

Connectors

Side	Connector panel OPS slot (for the iQ appliance) HDMI1 input connectors HDMI in USB Type-B HDMI2 input connectors HDMI in USB Type-B DisplayPort input connectors in USB-Type-B Stereo 3.5 mm out RS-232 in	iQ appliance USB 3.0 Type-A (×2) HDCP encrypted HDMI out RJ45
Bottom	USB 2.0 Type-A	
Back	AC power inlet	

Installation requirements

Interactive flat panel	See the <i>SMART Board 6000 and 6000 Pro series interactive displays installation and maintenance guide</i> (smarttech.com/kb/171167)
SMART Notebook Player mobile app	iOS 10 or later operating system software

SPECIFICATIONS

SMART BOARD 6065-V2 INTERACTIVE FLAT PANEL WITH IQ – MODEL SPNL-6265-V2

SMART kapp® app

Apple devices iOS 9 or later operating system software
50 MB of storage
iPhone 4S or later
Third-generation iPad or later
First-generation iPad mini or later
Fifth-generation iPod touch or later

Android™ devices Android 4.4.4 (KitKat) or later operating system
50 MB of storage (internal or SD card)
1024 MB of RAM
720p or better screen resolution
Bluetooth 2.1 + EDR
3 megapixel or better rear-facing camera (recommended)

SMART kapp viewer

Mobile Safari for iOS 9 or later operating system software
Chrome™ for Android 39.0.2171.93 or later

Desktop Internet Explorer® 10 or later
Chrome 39.0.2171.95 or later
Firefox® 34.0.5 or later
Safari 8.0 or later

Room computers and guest laptops

General requirements See the [SMART Notebook software release notes](#)

4K UHD Graphics card that can support 3840 × 2160 resolution at 30 Hz and that has 1 GB DDR 5 memory
See [Minimum requirements for Ultra High Definition or 4K on your interactive flat panel](#)

Mini-computers

General requirements See the [SMART Notebook software release notes](#)

Dimensions Smaller than 10" × 10" × 2" (25.4 cm × 25.4 cm × 5.1 cm)

Weight Less than 10 lb. (4.5 kg)

Mounting VESA 75 mm × 75 mm or 100 mm × 100 mm mounting pattern

Cable requirements

HDMI Maximum length: 23' (7 m)

NOTES

- Use only certified HDMI cables that have been tested to support the performance standard you require.
 - The performance of cables longer than 23' (7 m) is highly dependent on the cable's quality.
-
-

SMART BOARD 6065-V2 INTERACTIVE FLAT PANEL WITH IQ – MODEL SPNL-6265-V2

DisplayPort	DisplayPort 1.2 compliant or better Maximum length: 23' (7 m)
USB	Maximum length: 16' (5 m)
Important	Using cables that exceed these maximum lengths can produce unexpected results, such as degraded picture quality or USB connectivity. Refer to <i>SMART installation standards</i> (smarttech.com/kb/171035) for comprehensive information about cables and extensions for SMART hardware products.

Storage and operating requirements

Power requirements	100V to 240V AC, 50 Hz to 60 Hz
Interactive flat panel and iQ appliance power consumption at 77°F (25°C)	
Standby mode	15 W
Normal operating	113 W
Maximum operating	189 W
Standalone interactive flat panel power consumption at 77°F (25°C)	
Standby mode	<2.2 W
Normal operating (out-of-box)	110 W
Operating temperature	41–95°F (5–35°C)
Storage temperature	-4–140°F (-20–60°C)
Humidity	5–80% relative humidity, non-condensing

Certification and compliance

Regulatory certification	UL (U.S./Canada), FCC, IC, CE, EAC, RCM, SPRING, PSE
Environmental compliance	
European Union	REACH, RoHS, WEEE and Packaging
U.S.	Packaging and Conflict Minerals

Purchasing information

Order number	
SPNL-6265-V2	SMART Board 6065-V2 interactive flat panel with iQ and SMART Learning Suite
Optional accessories	
WM-SBID-501	Fixed wall mount for SMART Board interactive displays

SPECIFICATIONS

SMART BOARD 6065-V2 INTERACTIVE FLAT PANEL WITH IQ – MODEL SPNL-6265-V2

Other	See smarttech.com/accessories
Warranty	Three-year limited equipment warranty
Extended warranty	
EWY1-SPNL-6265	One-year warranty extension
EWY2-SPNL-6265	Two-year warranty extension